

**East Midlands Gateway
Phase 2 (EMG2)**

Document DCO 6.11C/MCO 6.11C

ENVIRONMENTAL STATEMENT

Technical Appendices

Appendix 11C

Lighting Receptor Locations

October 2025

11

The East Midlands Gateway Phase 2
and Highway Order 202X and The East Midlands Gateway
Rail Freight and Highway (Amendment) Order 202X

[SEGRO.COM/SLPEMG2](https://segro.com/slpemg2)

SEGRO

10/06/2025



EAST MIDLANDS GATEWAY

CHAPTER 11 APPENDIX 11C

LIGHTING RECEPTOR LOCATIONS

DOCUMENT DCO/MCO 6.11C

DFL-UK

17 City Business Centre, Hyde Street, Winchester, SO23 7TA
+44(0)1962 855080 | info@dfi-uk.com | www.dfi-uk.com



PROJECT NUMBER: 2389		DOCUMENT REF: 2389-DFL-ELG-XX-RP-EO-13003			
P03	Final Issue	DS	AS	AS	10/06/2025
P02	Second Issue	DS	AS	AS	02/05/2025
P01	First issue	DS	AS	AS	20/12/2024
Revision	Purpose Description	Originated	Checked	Approved	Date

Designs for Lighting (DFL) is a business built on successfully collaborating with our clients. We have over 20 years proven experience in our industry, listening to the challenges our clients face, developing the best solutions and being innovators in our specialism. Our role is to find the most effective and sustainable outcome to enhance and support your projects. We proudly work with recognised industry bodies to promote and shape the future of the industry and ensure our staff are trained to exceed the required competency levels of our industries. Above all, we ensure each project delivers against our values.



Quality



Knowledgeable



Dependable



Clear Advice

Table of Contents

1. Study Area	4
2. Lighting Receptor Locations	5
2.1. Human Amenity Receptors	5
2.2. Human Safety Receptors	6
2.3. Ecology Receptors.....	7
Technical Descriptions, Definitions & Abbreviations	8

Table of Figures

Figure 1: Study Area for Lighting.....	4
Figure 2: Human Amenity Receptors to Lighting	5
Figure 3: Human Safety Receptors to Lighting.....	6
Figure 4: Ecology Receptors to Lighting	7

1. STUDY AREA



Figure 1: Study Area for Lighting

2. LIGHTING RECEPTOR LOCATIONS

2.1. Human Amenity Receptors

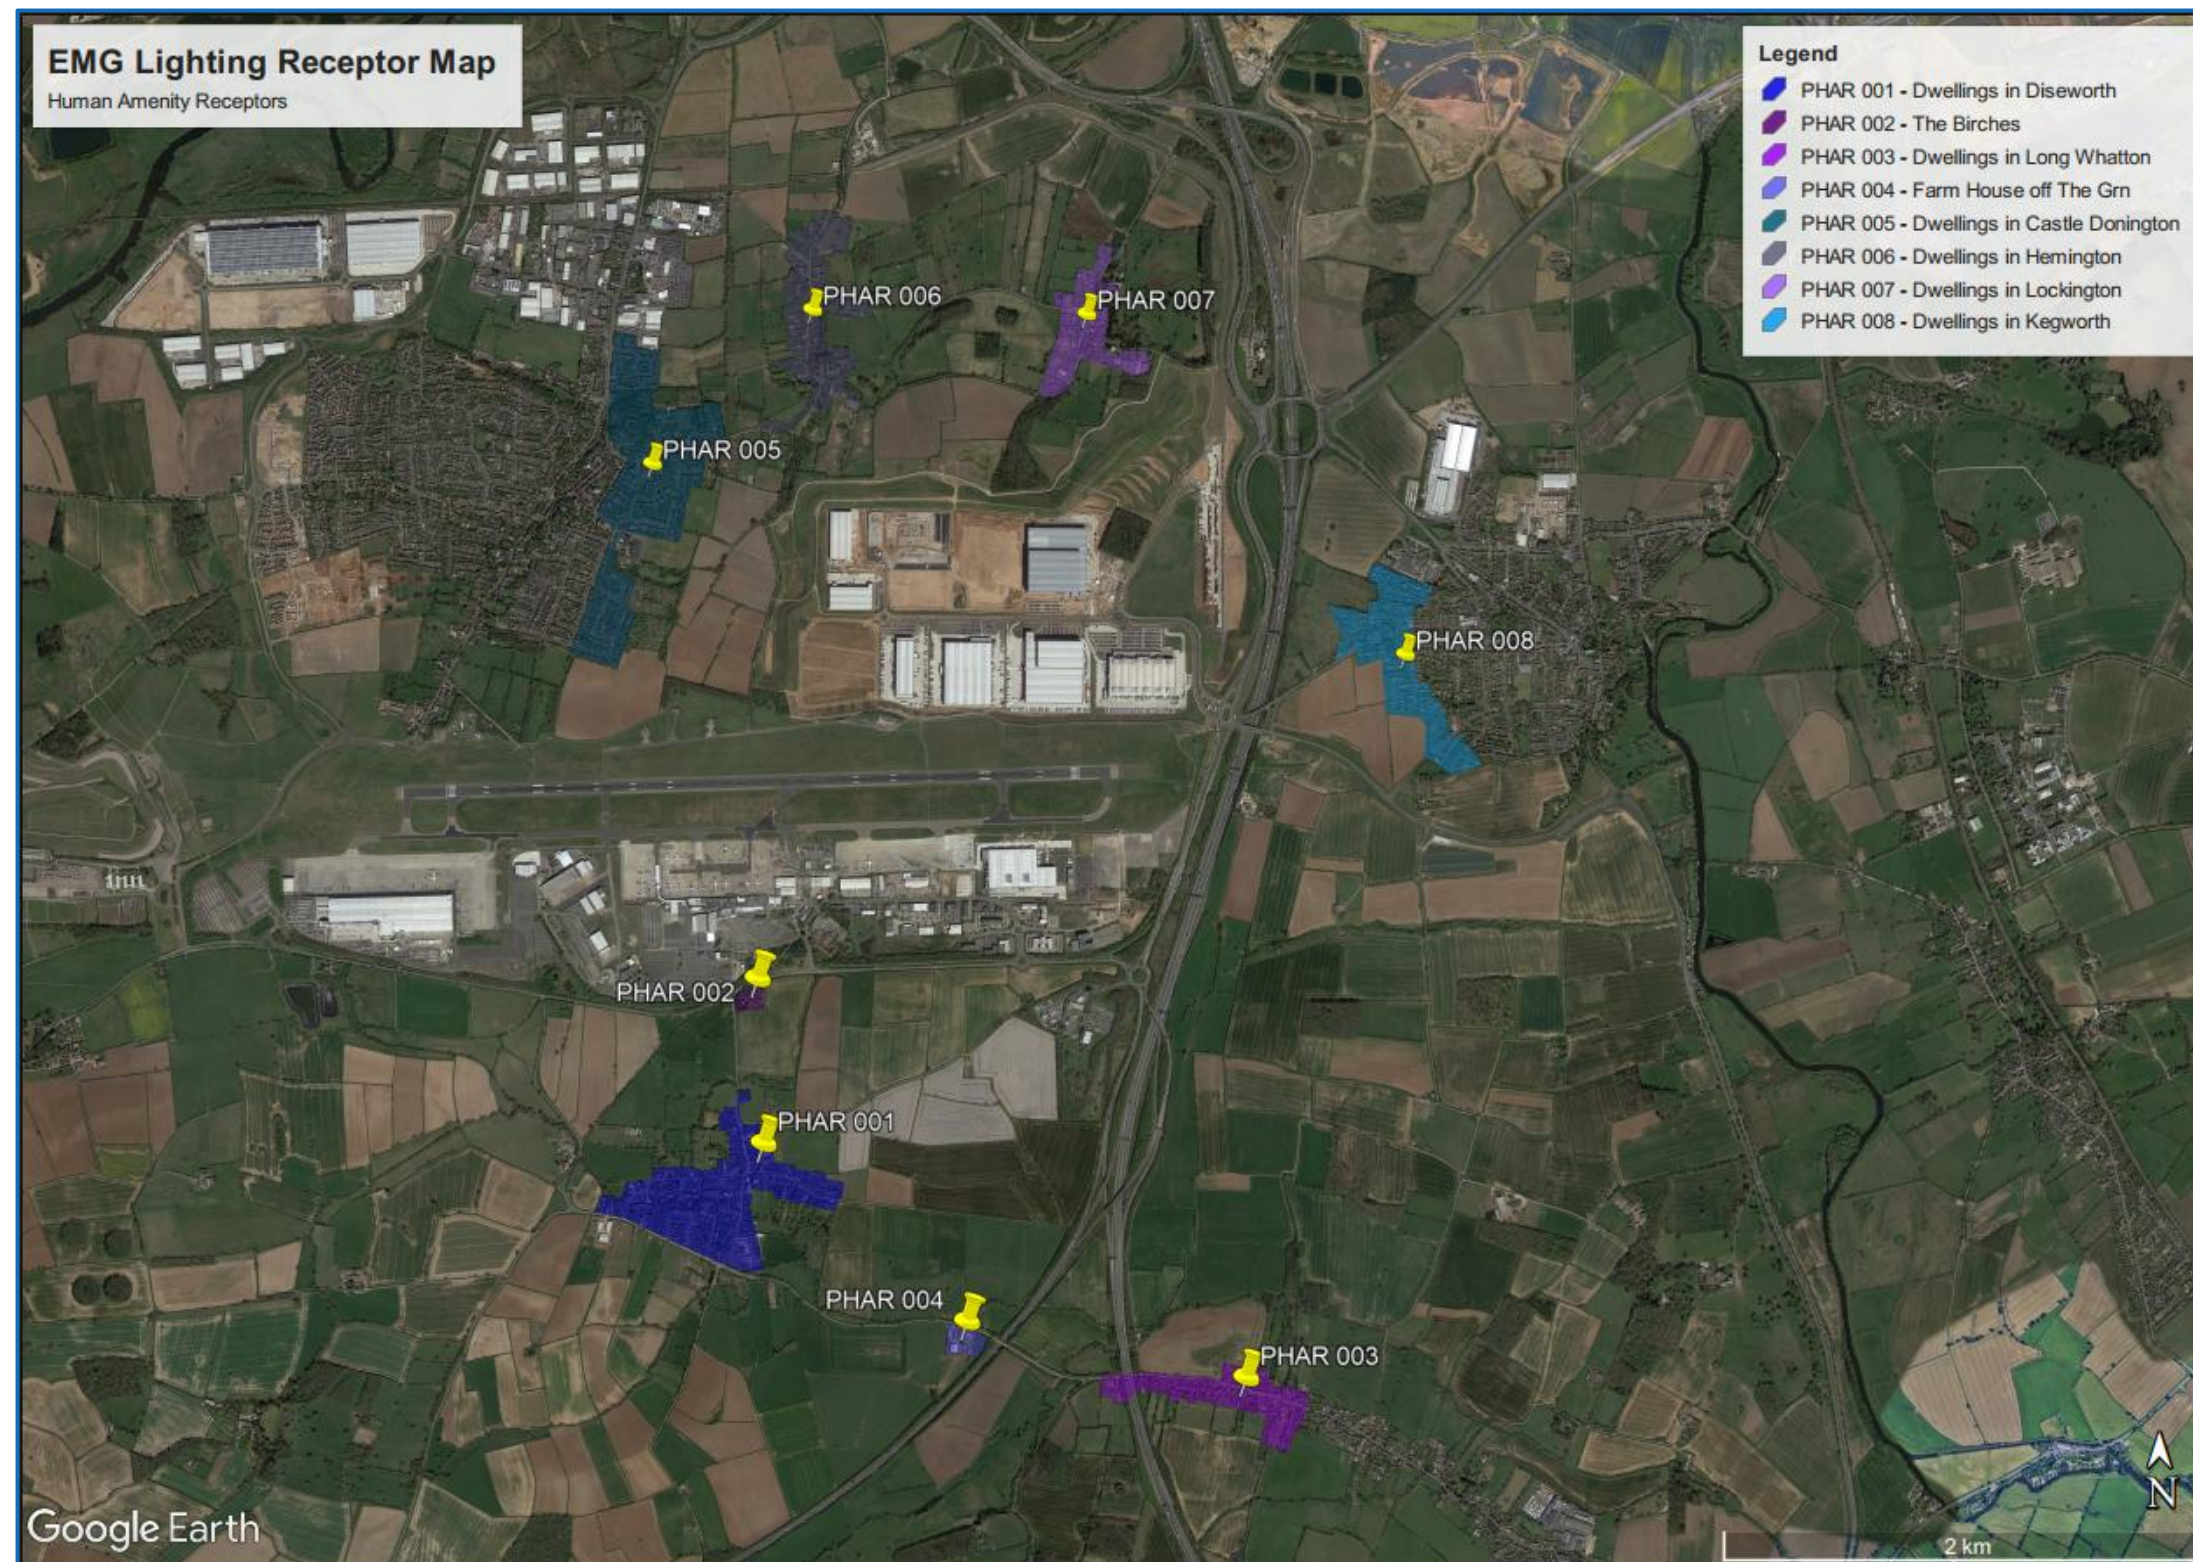


Figure 2: Human Amenity Receptors to Lighting

2.2. Human Safety Receptors

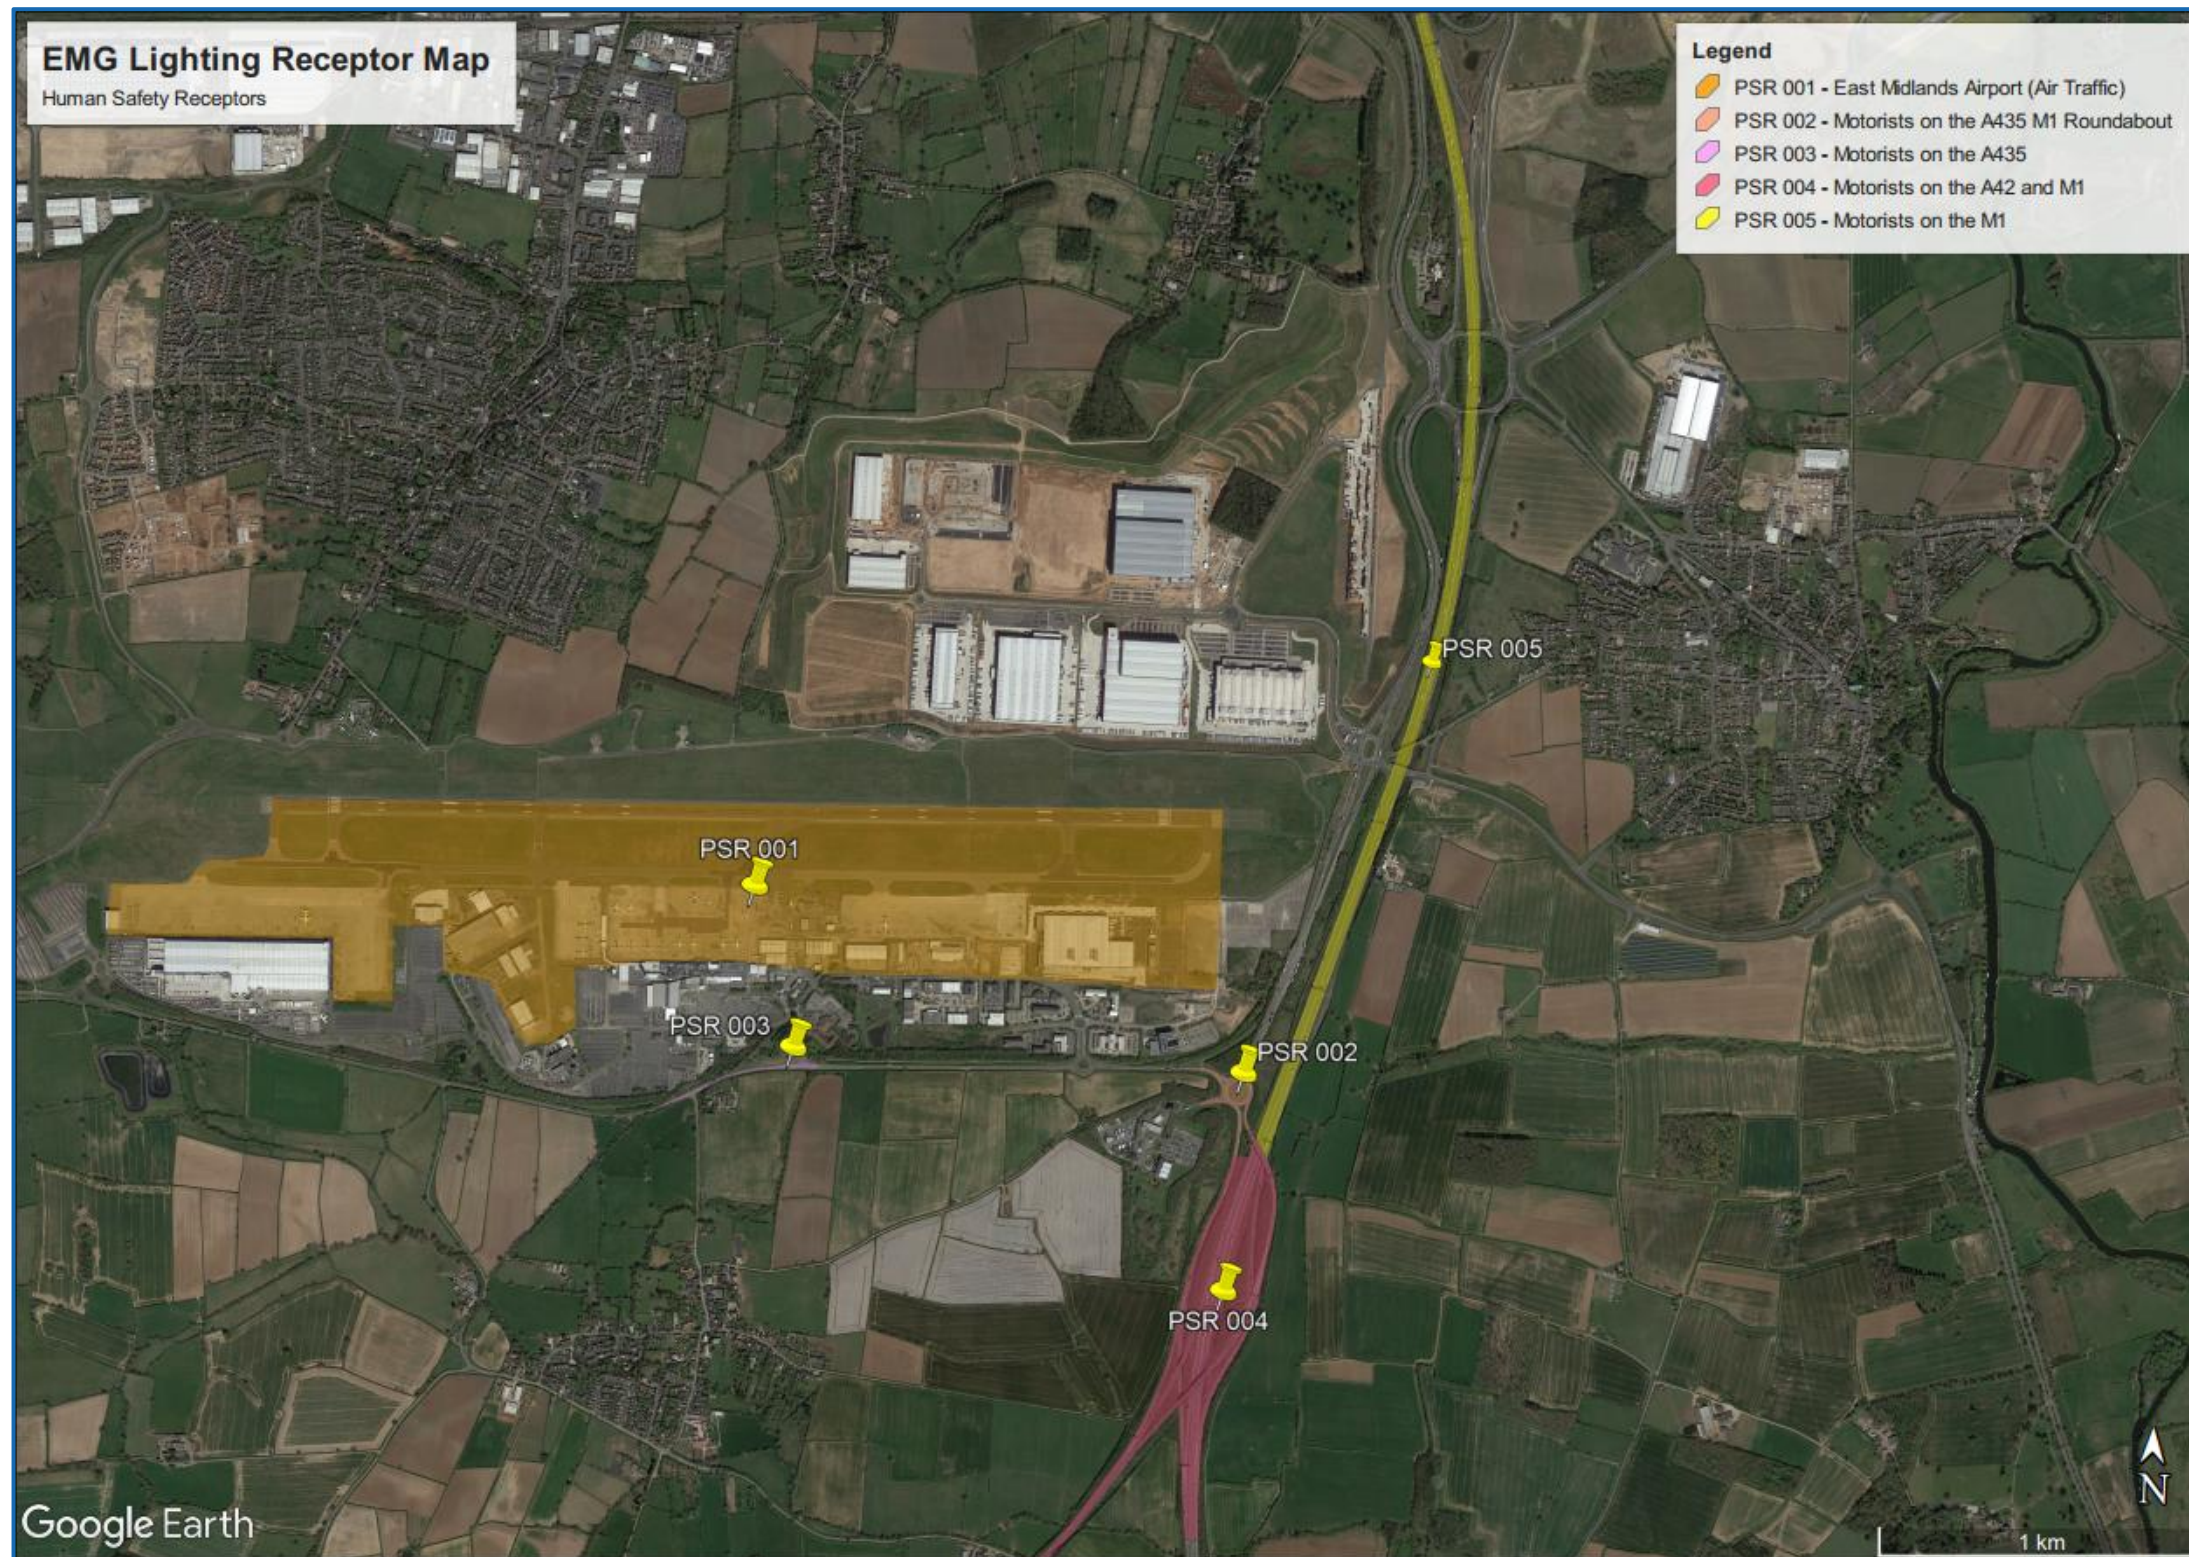


Figure 3: Human Safety Receptors to Lighting

2.3. Ecology Receptors

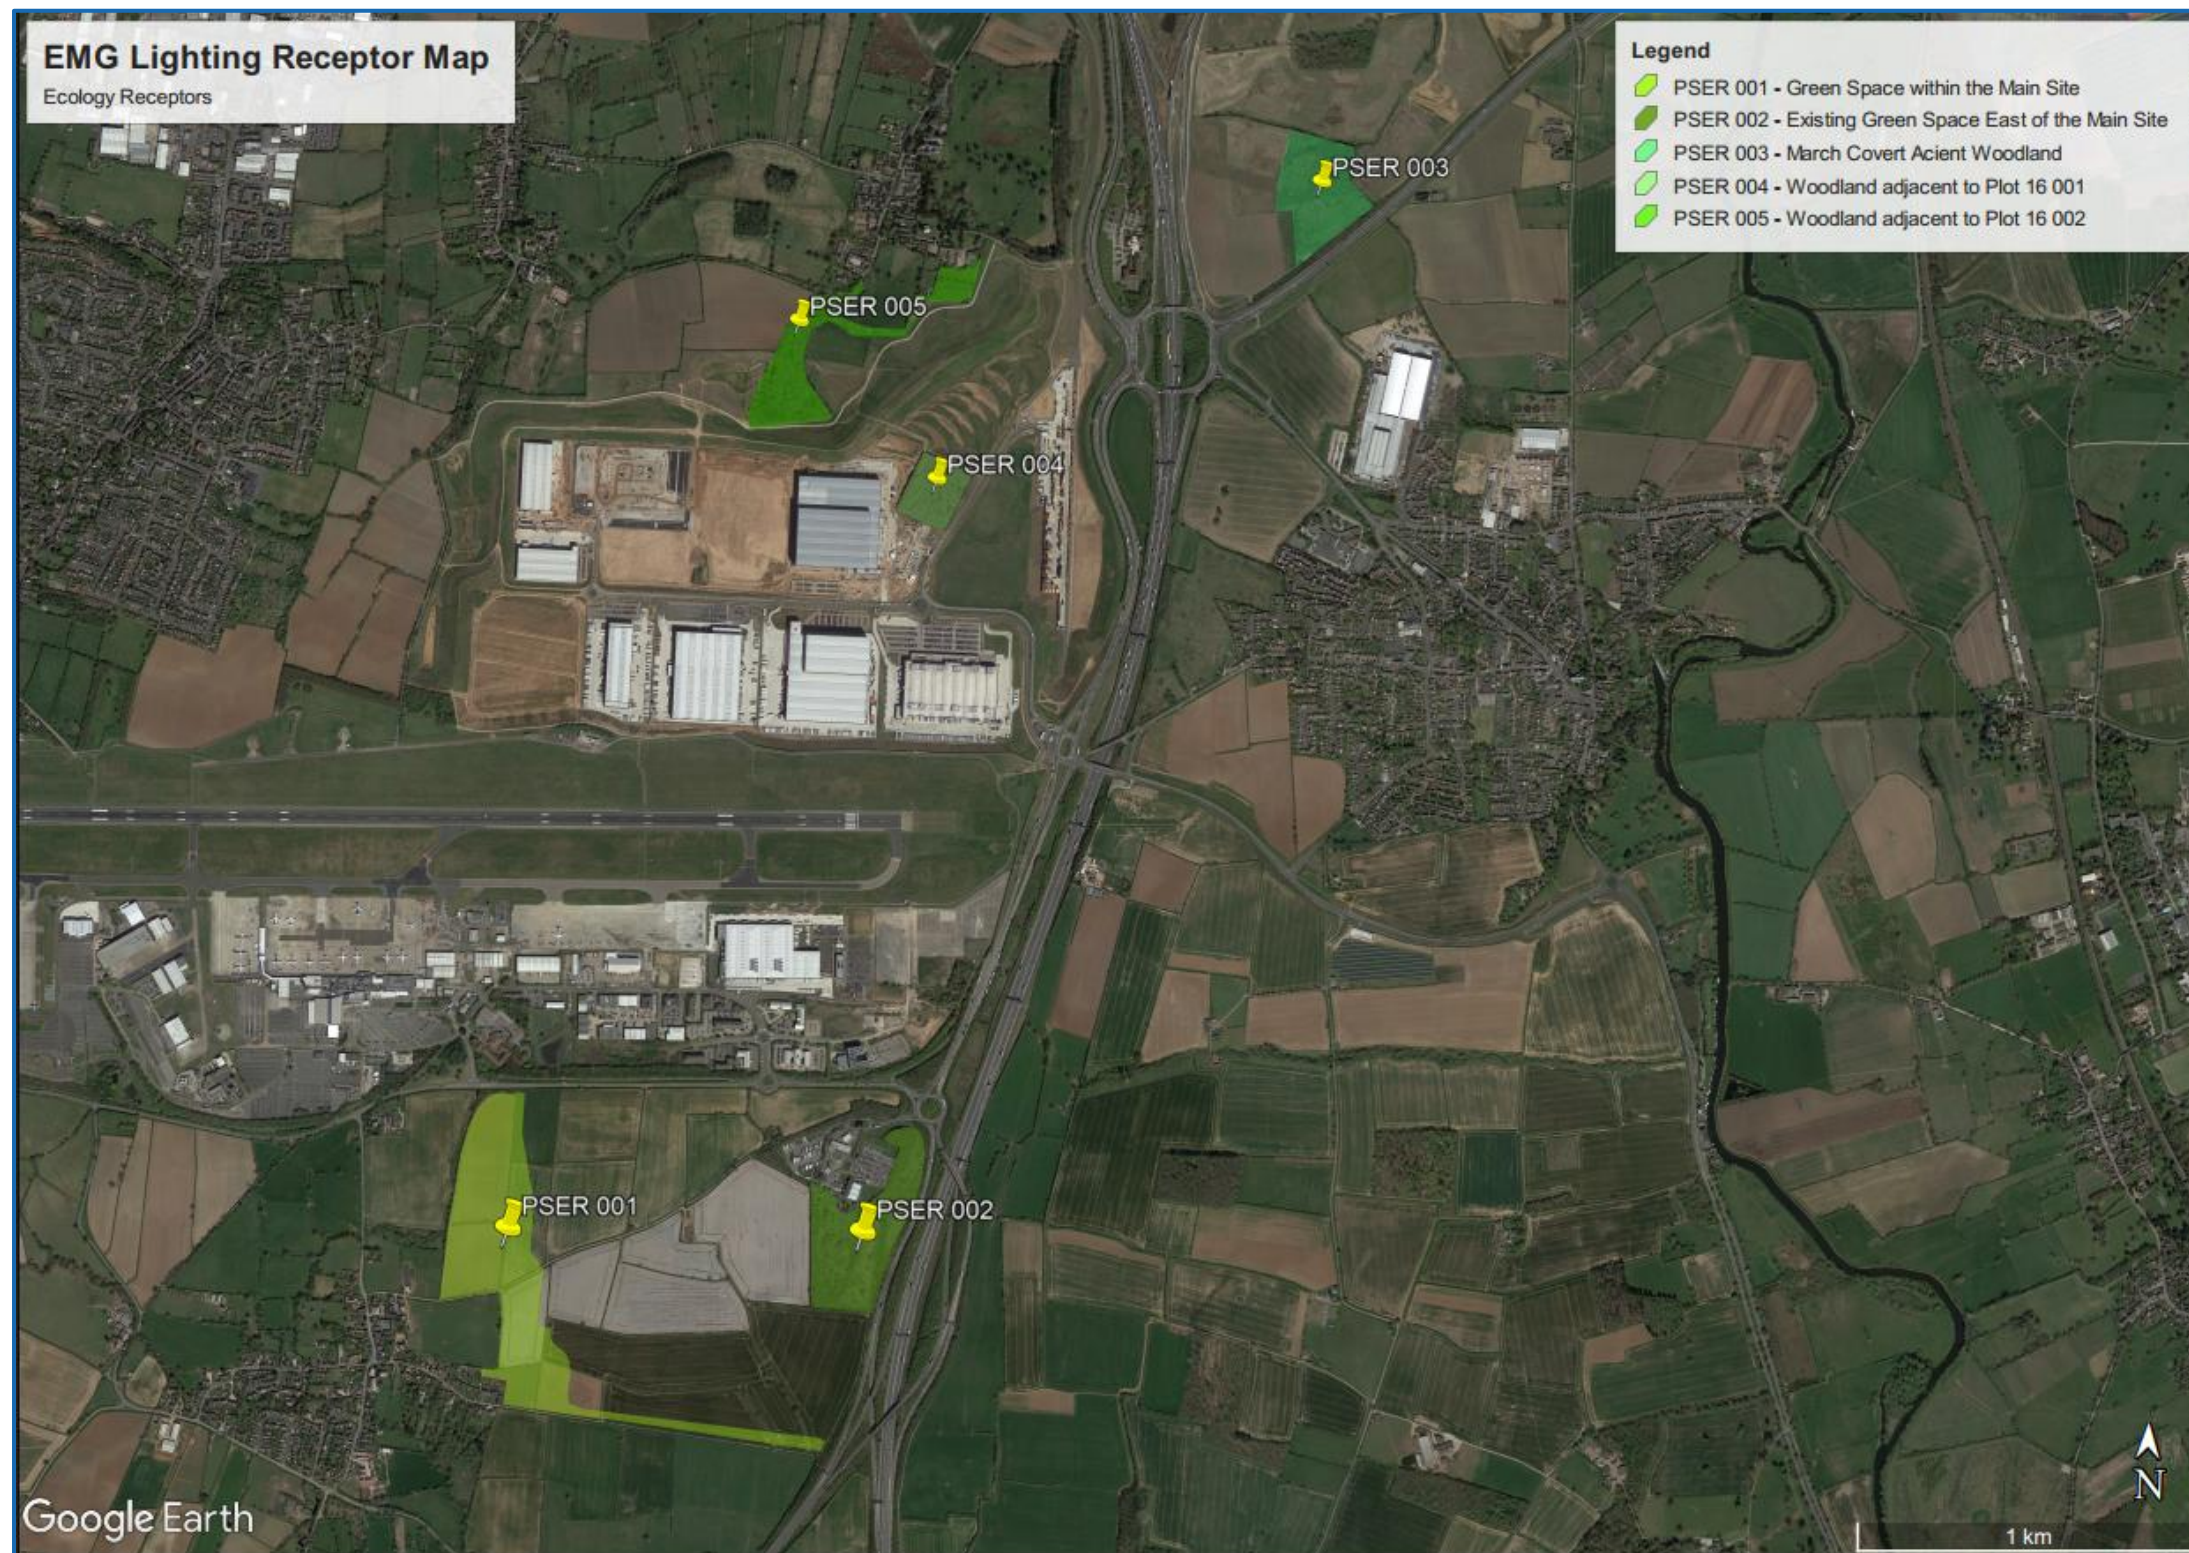


Figure 4: Ecology Receptors to Lighting

TECHNICAL DESCRIPTIONS, DEFINITIONS & ABBREVIATIONS

Obtrusive Light: refers to excessive or bothersome artificial light that goes where it shouldn't, causing discomfort and disruption. *Spill light which because of quantitative, directional or spectral attributes in a given context gives rise to annoyance, discomfort, distraction or reduction in the ability to see essential information.* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Sky glow: When lights are directed upwards or light is scattered by particles in the air, like dust or water droplets, it creates a glow that makes it hard to see stars. *The increase in diffuse illuminance of the night sky above that produced by natural sources such as the moon and visible star.* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Vertical Illuminance: is how much light lands on upright surfaces like walls. It's measured in lux or footcandles and matters for places where the view from a vertical angle is important. *Lighting of vertical surfaces such as walls, windows, statues, sculptures and people's faces.* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Correlated colour temperature (CCT): the appearance of light emitted by a light source measured in Kelvin (K), Lower CCT values such as 2700K represent warmer, more yellowish light, *similar to the light from older incandescent lamps. (Tcp)The temperature of the Planckian radiator whose perceived colour most closely resembles that of a given stimulus at the same brightness and under specified viewing conditions, measured in absolute temperature on the kelvin (K) scale.* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Lux: measures the brightness of light as perceived by the human eye at a specific point on a surface. *The SI derived unit of illuminance, measuring luminous flux per unit area (1 lux = 1 lumen/m²).* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Lumens: measure how bright a light appears to our eyes. *The SI derived unit of luminous flux; a measure of the total quantity of visible light emitted by a source or received by a surface (unit: lumen).* [CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.](#)

Glare: refers to an excess of bright light that makes you uncomfortable or hinders your vision. It happens when there's a big difference between a bright light and the rest of the surroundings. *Glare: condition of vision in which there is discomfort or a reduction in the ability to see details or objects, caused by an unsuitable distribution or range of luminance, or by extreme contrasts.* [BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.1.8](#)

Luminous intensity: is light brightness or how intense the light source is. light intensity is how intense a light source is emitted or received in a particular direction, this is measured candelas and is termed as luminous intensity I_v <of a source, in a given direction> quotient of the luminous flux, $d\Phi_v$, leaving the source and propagated in the element of solid angle $d\Omega$ containing the given direction, by the element of solid angle (unit: $cd = lm \cdot sr^{-1}$). BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.2.2.

Candela: is a measurement for the brightness of a light source, taking into account the direction in which the light is emitted. Base unit of luminous intensity in the International System of Units (SI); the luminous power per unit solid angle emitted by a point light source in a particular direction. CIBSE LG21 Lighting Guide 21: Protecting the night-time environment.

Uniformity (Uo): is an explanation for the even distribution of light across an area or surface. The overall uniformity shall be calculated as the ratio of the lowest luminance, occurring at any grid point in the field of calculation, to the average luminance. BS EN 13201-3-2015, Calculation of Performance Section 8.3.

Luminance: is how bright a surface appears to our eyes. It considers the light coming from or reflected by an object. L_v <in a given direction, at a given point of a real or imaginary surface> quantity defined by the formula (unit: $cd \cdot m^{-2} = lm \cdot m^{-2} \cdot sr^{-1}$) BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.2.3.

Illuminance is how much light lands on a surface per square meter. It's measured in lux. More lux means a brighter area. E_v (unit: $lx = lm \cdot m^{-2}$) 1. <at a point of a surface> quotient of the luminous flux $d\Phi_v$ incident on an element of the surface containing the point, by the area dA of that element 2. <at a point of a surface> equivalent definition: integral, taken over the hemisphere visible from the given point, of the expression. BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.2.10.

Luminaire: a light fixture, this is also sometimes referred to as a lantern or a light fitting, is a product that produces artificial light. apparatus which distributes, filters or transforms the light transmitted from one or more lamps and which includes, except the lamps themselves, all the parts necessary for fixing and protecting the lamps and, where necessary, circuit auxiliaries together with the means for connecting them to the electric supply BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.3.3

ULOR: upward light output ratio or ULOR refers to the amount of light the light fixture will produce upwards as a percentage of its total light output. $RULO$ <of a luminaire> ratio of the upward luminous flux of the luminaire, measured under specified practical conditions with its own lamp(s) and equipment, to the sum of the individual luminous fluxes of the same lamp(s) when operated outside the luminaire with the same equipment, under specified conditions BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.3.12.

Maintenance factor (MF): is an allowance for how well the lights keep working overtime. It considers things like dirt on the light fittings and "wear and tear". DEPRECATED: light loss factor ratio of illuminance produced by the lighting installation after a certain period to the illuminance produced by the installation when new Note 1 to entry: The term depreciation factor has been formerly used to designate the reciprocal of the above ratio. Note 2 to entry: The maintenance factor takes into account light losses caused by dirt accumulation on luminaires and room surfaces (in interiors) or other relevant surfaces (in exteriors, where appropriate), and the decrease of the luminous flux of lamps. BS EN 12665-2018, Light and lighting - Basic terms and criteria for specifying lighting requirements, Section 3.5.18.

Tilt: is how much the luminaire is lifted based on the fitting facing flat to the ground.

Outreach: how far away the fitting is from the column/wall its mounted on to the light source.

This isn't the end...

We don't just have the solution for what you need today. We also have the solutions you might need for the future. We have dedicated teams that deliver.

- **Lighting Impact and Planning** teams that focus on delivering the most effective and sensitive lighting solutions to support planning.
- **Residential** teams that cover all aspects of new development and redevelopment spanning private, section 38 and section 278 design packages.
- **Public Realm** teams that are experts in enhancing night-time public spaces to create inviting spaces and opportunity for local economies to thrive during the hours of darkness.
- **Electrical** teams – we don't just put a light in the ground, we can help you get power to it as well! Additionally, we also offer design services for EV charging. As this market rapidly expands, make sure you have the experts managing the load, otherwise your EV charging solutions might not live up to expectations.
- **Strategic Infrastructure** teams that offer Lighting and Electrical expertise for complex transport networks and interchanges.
- **Consultancy Services** teams that help when you know what you want but you need someone to help you turn the idea into a project.

Finally, as innovators, you might be facing something bespoke or niche. Don't worry – we might have the answer you need. Feel free to get in touch!

THE POWER TO MAKE LIGHT WORK



Daniel Spreadborough

Senior Engineer



+44 (0)1962 855080



daniel.spreadborough@dfi-uk.com



www.dfi-uk.com/



17/18 City Business Centre, Hyde
Street, Winchester, Hampshire,
SO23 7TA